

## - VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 24 solid (1-wire), RAL 5021 (water blue), RJ45/IP67 on open cable end, length: 5 m



### Ethernet

#### Key commercial data

Packing unit	1 1
Minimum order quantity	10 1
Weight per Piece (excluding packing)	354.0 GRM
Custom tariff number	85444210
Country of origin	Germany

#### Technical data

##### Mechanical characteristics

Number of positions	4
Shielded	Yes
Cable structure	2x2xAWG24/1; S-UTP
Length of cable	5 m

##### Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)
	(Plug / socket)
Degree of protection	IP67

##### Material data

Outer sheath, material	Halogen-free compound, HM 2 in acc. with VDE 0207
External sheath, color	water blue RAL 5021

##### Electrical characteristics

Rated voltage (III/3)	60 V
-----------------------	------

# - VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

## Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801

## ETIM


ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

## UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501


## Drawings

Dimensioned drawing

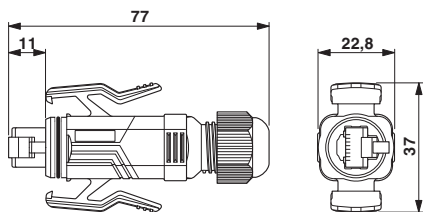

RJ45 connectors, IP67, QUICKON fast connection technology


Schematic diagram

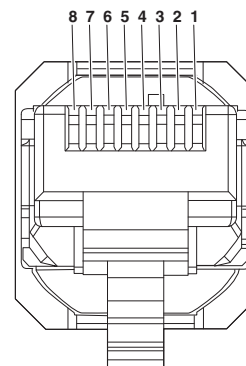

Connector pin assignment plug RJ45

## - VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Schematic diagram

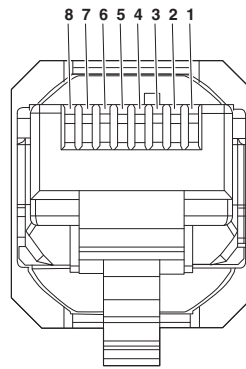

Connector pin assignment plug RJ45