## **EM2416 Series EuroMag Terminal Blocks**

Pluggable Block with Flanges (Mates with EM2426 Series); 7.62 Centers

### **SPECIFICATIONS**

Rating: 16A, 300V

Center Spacing: 0.30" (7.62mm) Wire Range: #12-24 AWG

Housing Material: UL rated 94V0 Thermoplastic

Contact Material: Tin-Plated Brass Cage Material: Brass, Nickel-Plated Screw Size: M2.6 Zinc-Plated Steel

Operating Temperature: 105°C (221°F) max., -40°C

(-40°F) min.

Torque Rating: 7.0 lb-in.

Construction: Mold-to-Length Agency Information: File E62622; CE Certified




EM241602

# **Poles** L (mm) 23456789 24.90 32.50 40.10 10 101.10

To convert to inches, divide by 25.4

#### **Dimensions - mm**

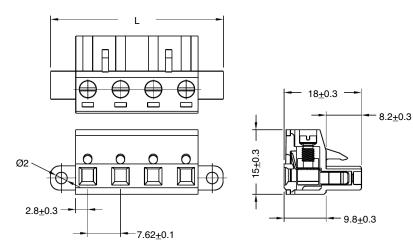

## **Part Numbering System**

**Series** # of Poles Mating Header: EM2426 pg. 102

EM2416

02 to 12