

STRADA-SQ-FT

Forward throw beam for area lighting. Assembly with installation tape. Version with location pins.


TECHNICAL SPECIFICATIONS:

Dimensions	25 + 25 mm
Height	12.7 mm
Fastening	pin, screw, tape
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7.2 kg
Quantity in Box	1568 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour
STRADA-SQ-FT	Lens	PMMA	clear
ROSE-TAPE	Tape	PU tape	black

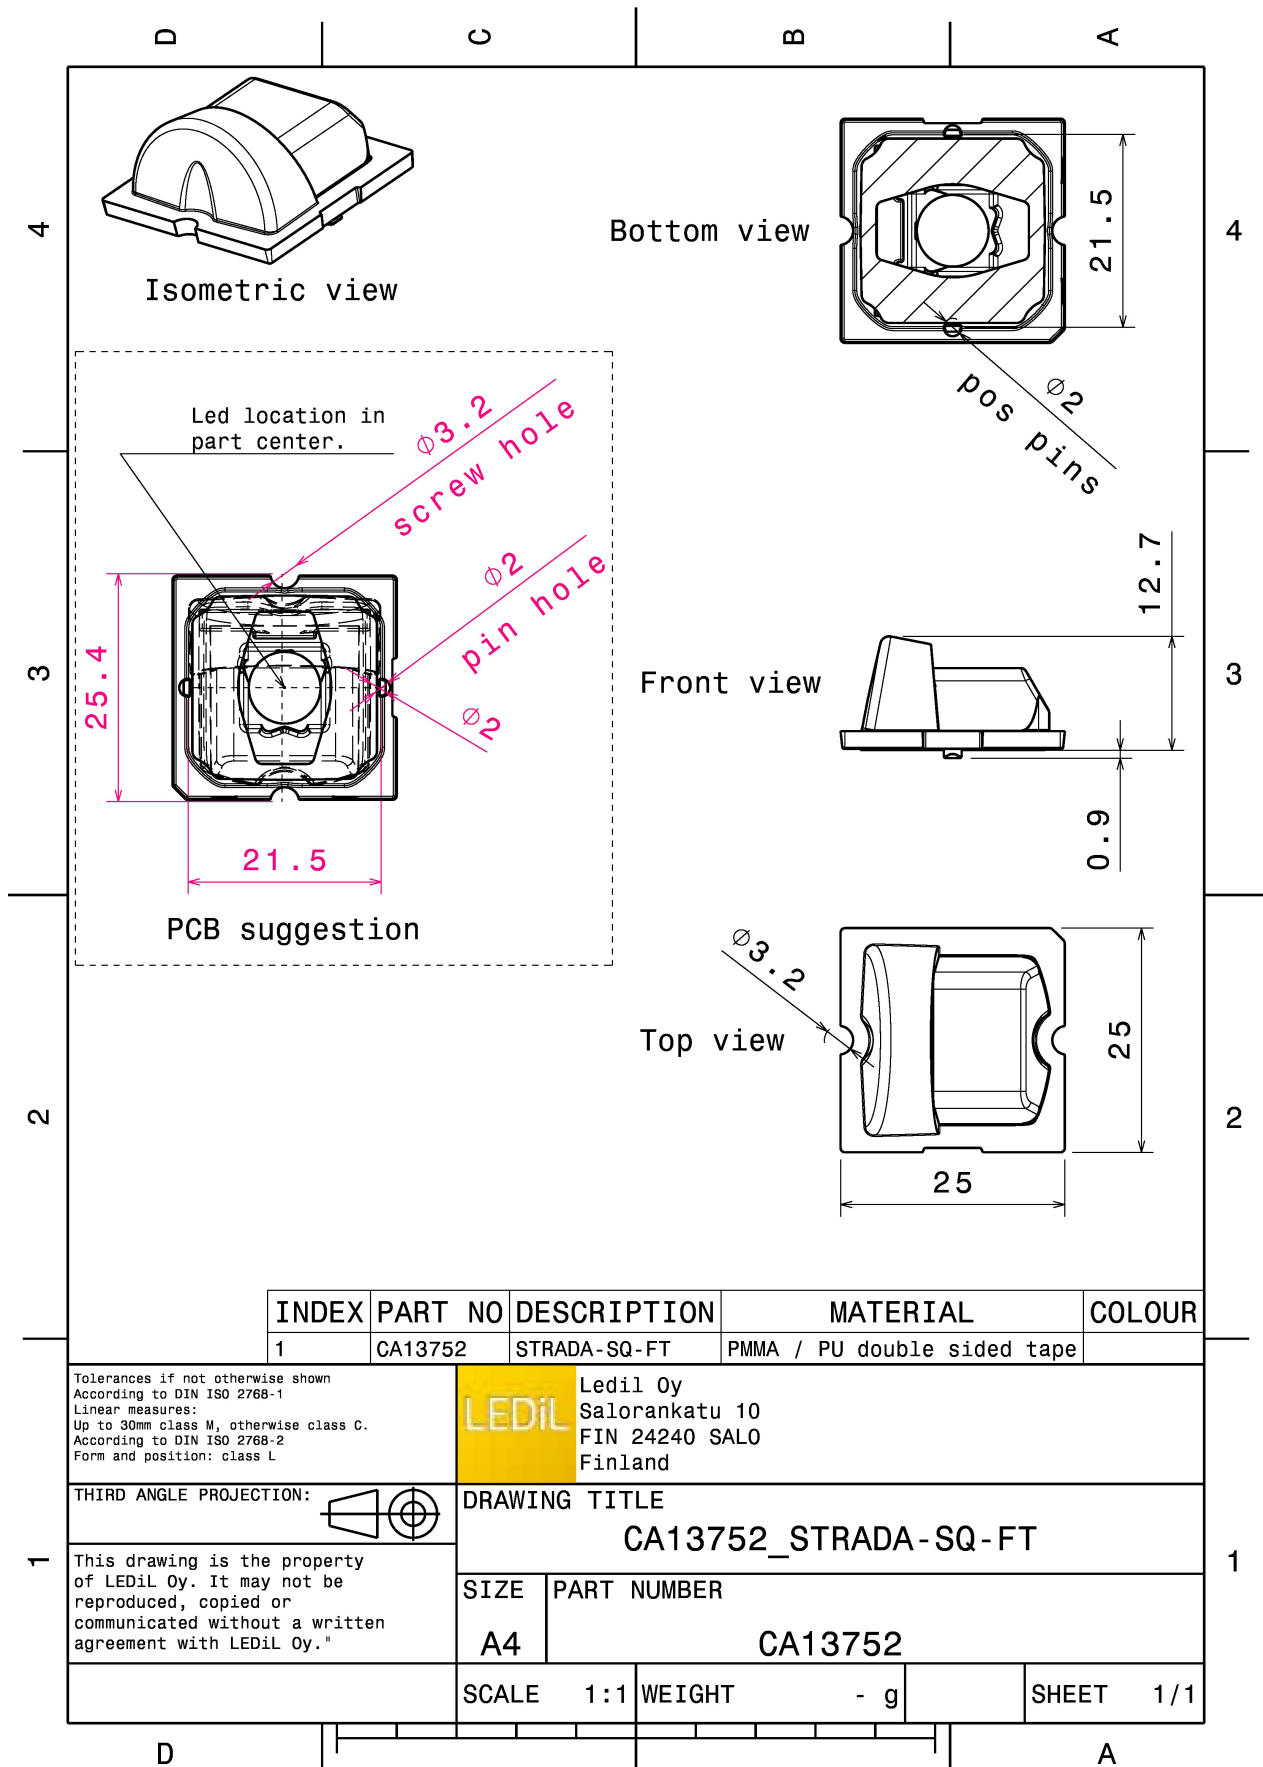


PHOTOMETRIC DATA (MEASURED):




LED MK-R
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.600 cd/lm
Required components:

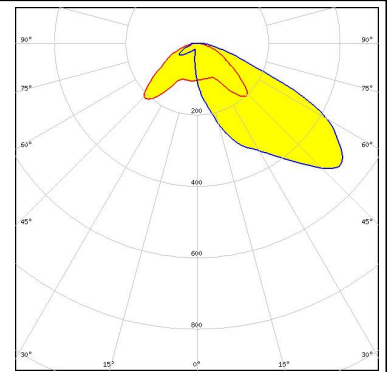


LED XHP50
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.610 cd/lm
Required components:

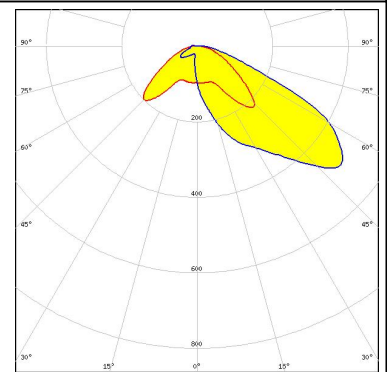

LED XM-L
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.700 cd/lm
Required components:

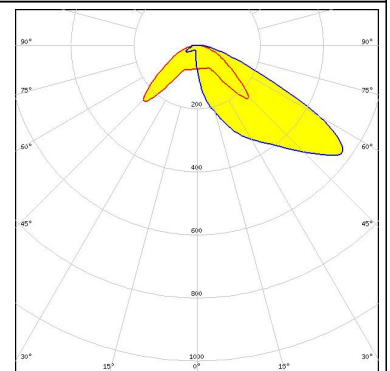


LED XP-L
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.700 cd/lm
Required components:

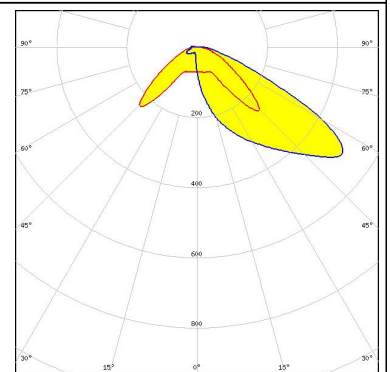


PHOTOMETRIC DATA (MEASURED):




LED XP-L2
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.660 cd/lm
Required components:

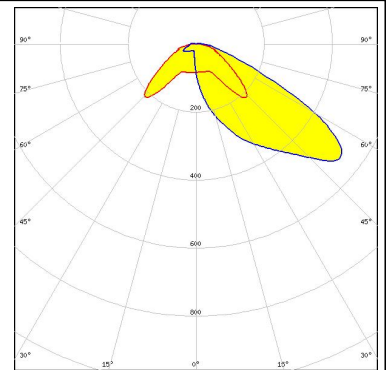


LED LUXEON M/MX
FWHM Asymmetric
Efficiency 88 %
Peak intensity 0.620 cd/lm
Required components:

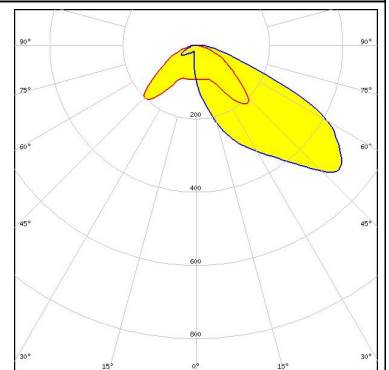

LED LUXEON MZ
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.710 cd/lm
Required components:

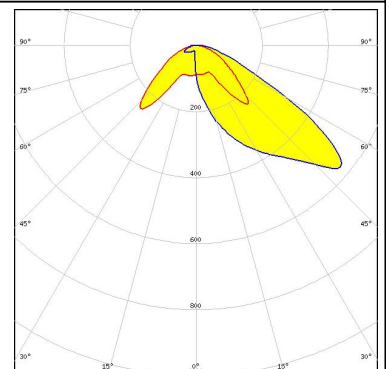


LED LUXEON XR-M linear 1x3, 1x4, 1x5
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.650 cd/lm
Required components:

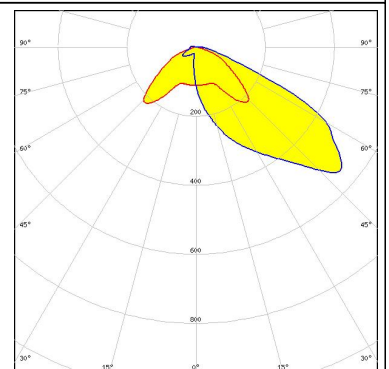

PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors


LED Duris S10
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.610 cd/lm
Required components:

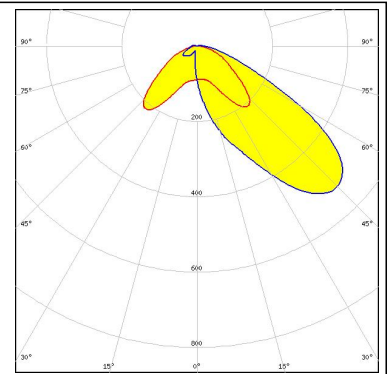


PHOTOMETRIC DATA (SIMULATED):




LED MX-3
FWHM Asymmetric
Efficiency 90 %
Peak intensity cd/lm
Required components:

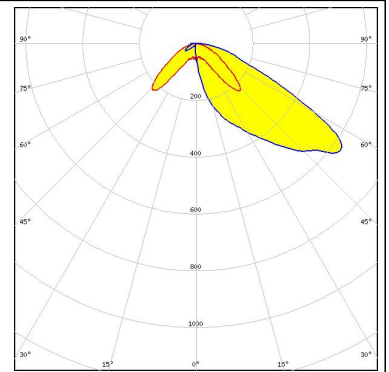


LED MX-6
FWHM Asymmetric
Efficiency 90 %
Peak intensity cd/lm
Required components:

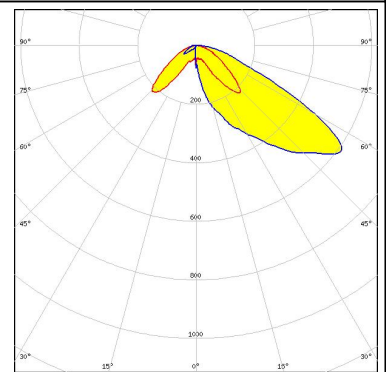

LED XM-L2
FWHM Asymmetric
Efficiency 90 %
Peak intensity cd/lm
Required components:

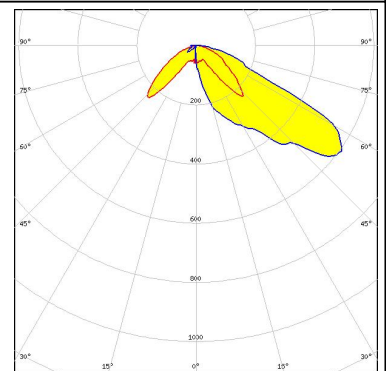

LED XP-G2
FWHM Asymmetric
Efficiency 89 %
Peak intensity cd/lm
Required components:

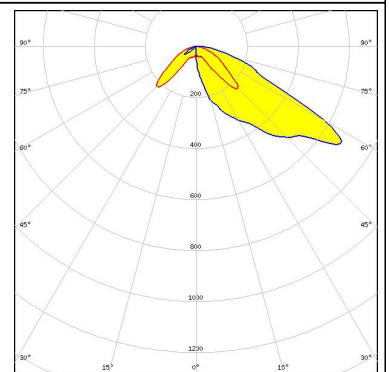


PHOTOMETRIC DATA (SIMULATED):



LED XP-G3
FWHM Asymmetric
Efficiency 76 %
Peak intensity 0.656 cd/lm

Required components:


Undefined Manufacturer: Protective Plate, Glass

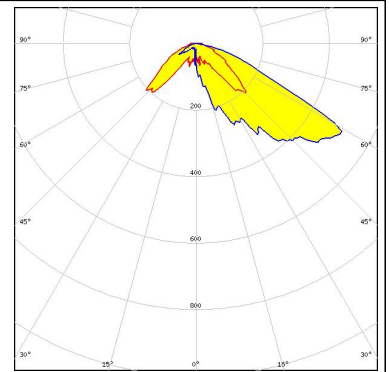

LED XP-L2
FWHM Asymmetric
Efficiency 76 %
Peak intensity 0.640 cd/lm

Required components:

Undefined Manufacturer: Protective Plate, Glass

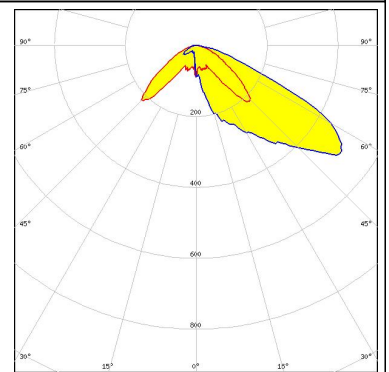

LED LUXEON M/MX
FWHM Asymmetric
Efficiency 78 %
Peak intensity 0.570 cd/lm


Required components:

Undefined Manufacturer: Protective Plate, Glass



LED OSCONIQ P 7070
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.790 cd/lm

Required components:

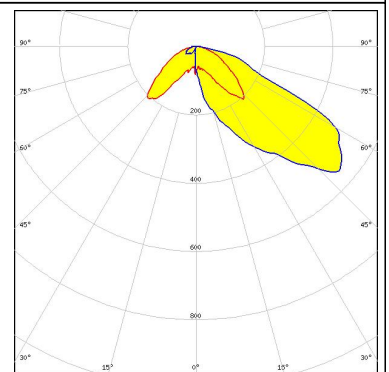

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)